

# Indicator Lights

## Approvals


UL recognized, CSA certified. Dielectric strength: 1250 volts (live parts to ground). Life: 35,000 hours average rating. Insulation resistance: 5 megohms.

## Lamps


6, 12 and 28 volt incandescent lamps standard.  
125 and 250 volt neon lamps standard.

## Markings


Letters, numbers and symbols can be applied to lens or to integral nylon bezel; see inside back cover for details.

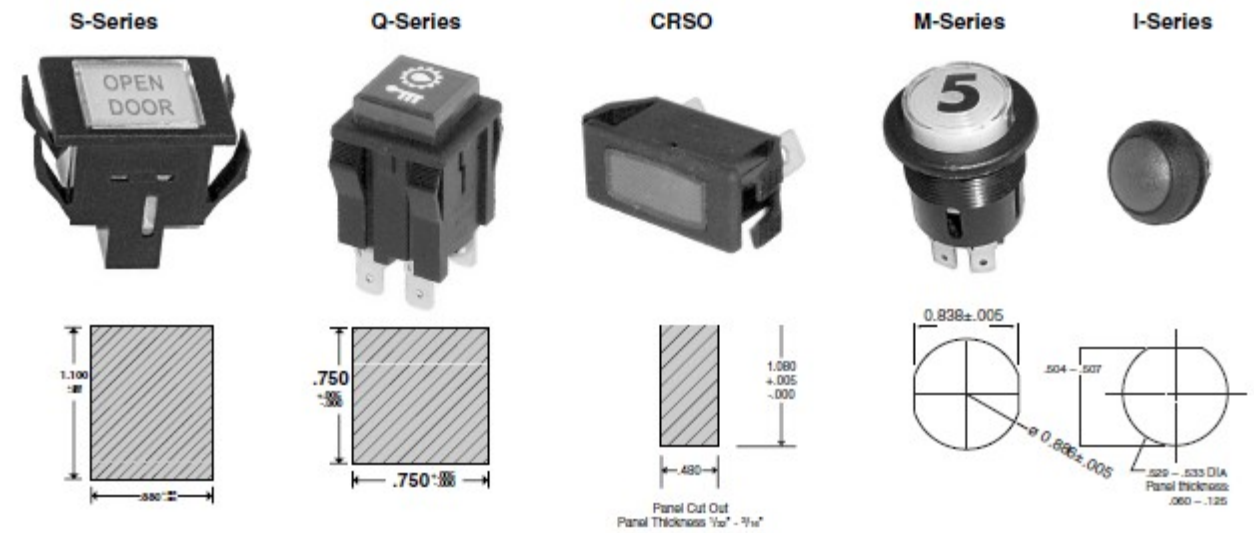

### Ordering Information for S-Series, Q-Series and CRS-Series:

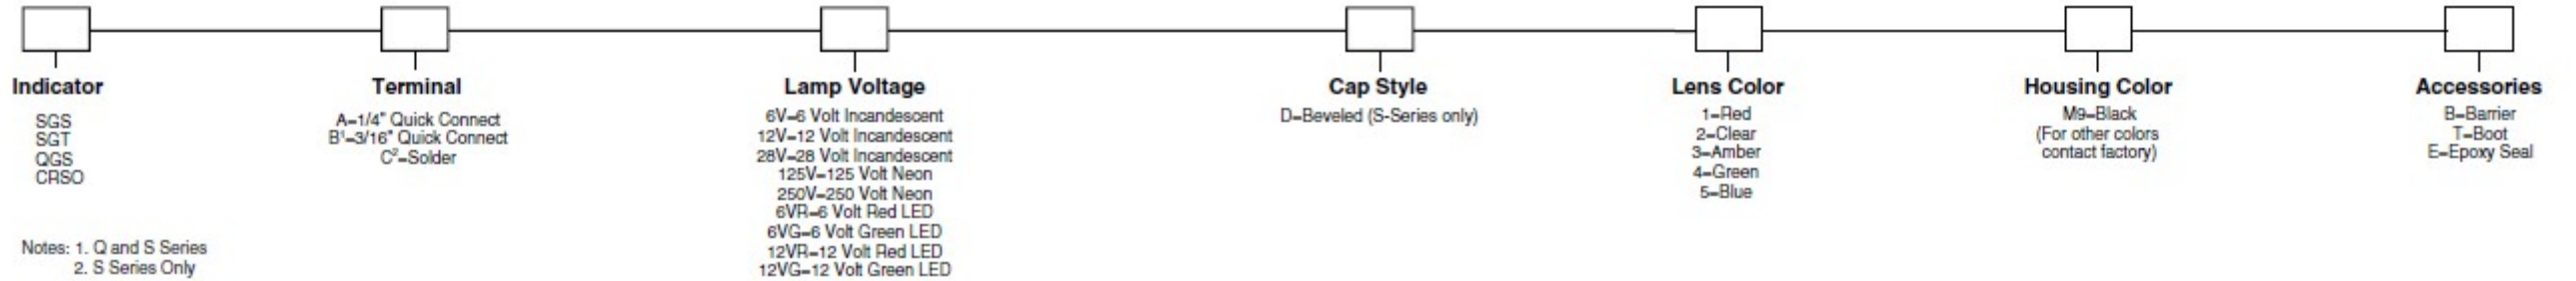

### Ordering Information for M-Series:

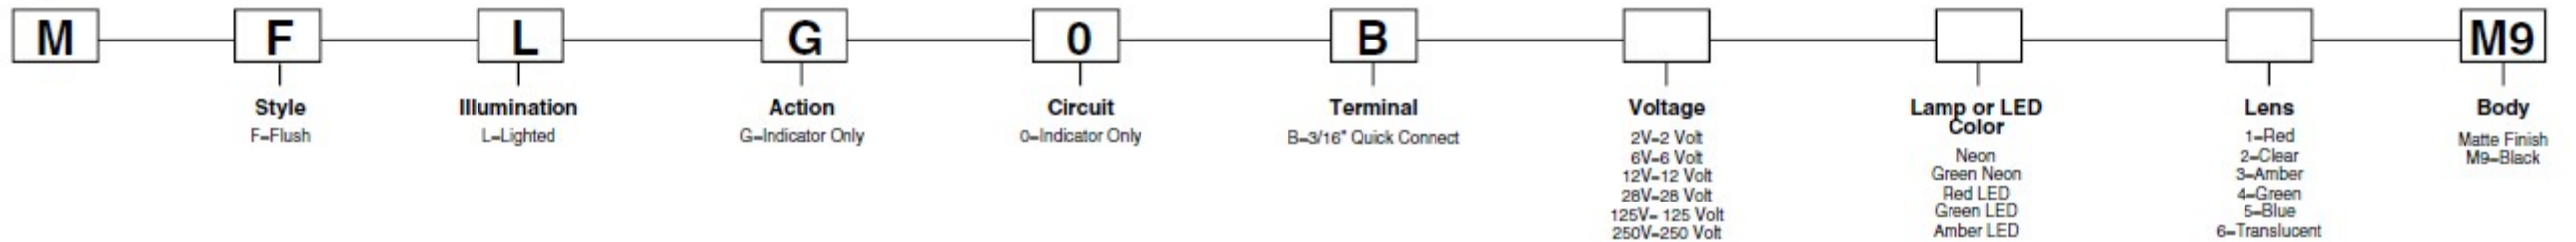

### Ordering Information for L-Series:

